

## Matrix-4X4-HBT-H2-KIT

### HDBaseT Matrix UHD including 4 Receivers



#### FEATURES:


- HDMI resolution up to 4K@60Hz 4:4:4.
- compliant with the HDMI 2.0 and HDCP 2.2.
- 4K signal to the distance up to 40 meter and 1080p up to 70 meters

The matrix is an four-input by four-output HDBaseT and HDMI matrix with HDCP 2.2 and up to 4K/UHD@60Hz video support. It transmits 4K video to distances up to 131 feet (40 meters) and 1080p video to distances up to 229 feet (70 meters) over a single CATx Ethernet cable. HDBaseT outputs support the Power over Cable (PoC) feature, allowing the receivers to draw their power from the matrix over the HDBaseT cable.

The matrix not only supports bi-directional IR, RS232 extension but also has IR, RS232, and TCP/IP control options.

#### Diagram

##### HDBaseT Matrix 4x4

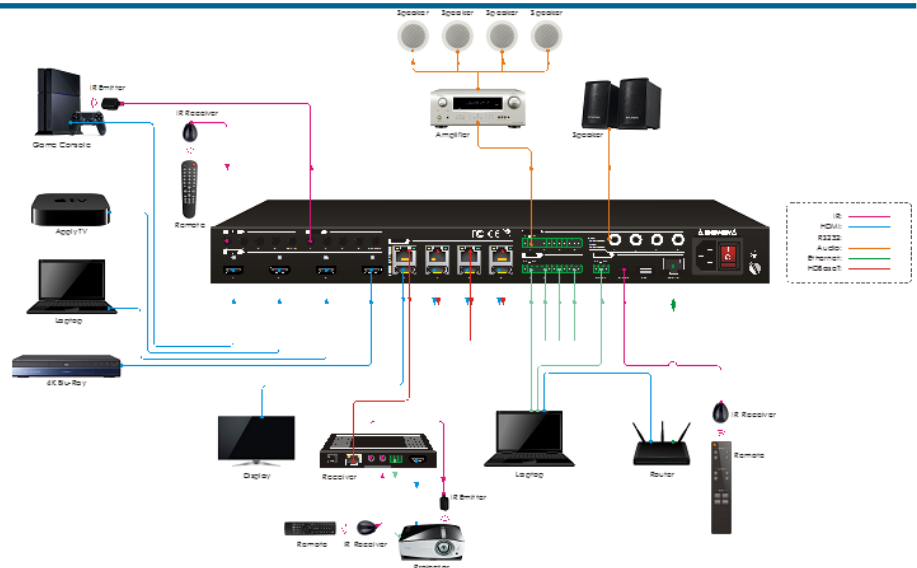

#### SPECIFICATIONS:

Input	4 x HDMI
Output	4 x HDBaseT / 4 x HDMI / 4 x Stereo analog audio / 4 x Digital coaxial audio
Resolution	HDMI: Up to 4Kx2K@60Hz 4:4:4 / HDBaseT: 4Kx2K@60Hz 4:2:0
HDMI Standard	2.0
HDCP Version	2.2
Control	IR, RS232, TCP/IP
Audio Format	PCM
HDBaseT Bandwith	18Gbps
Transmission Distance	1080p ≤ 70 meters / 4K@60Hz ≤ 40 meters
Operating Temperature	-10°C ~ 55°C
Storage Temperature	-25°C ~ 70°C
Relative Humidity:	10% ~ 90%
Power Supply	Input: 100V~240V AC; 50/60Hz
Power Consumption	85W (Max)                      Receiver: 14W (Max)
Dimensions	436.4 x 44 x 340 mm            Receiver: 115 x 16 x 84
Weight	3.2 kg                                Receiver: 153 gram



GeMNeXT is brand of

AVDIS B.V.  
Ambachtstraat 3A  
3732 CN DE BILT

The Netherlands

[www.gemnext.com](http://www.gemnext.com)

[info@gemnext.com](mailto:info@gemnext.com)

+31- (0)85 2100 614