

VW-2X2-H2

Video Wall Processor UHD - 2x2



**FEATURES:**

- Supports up to 3840x2160 input
- HDCP 2.2 compliant
- RS232 control
- 2.0 channel, 5.1 channel, LPCM, Dolby, AC3, DTS

This Video Wall Processor is an HDMI 2.0 Video Wall controller with 2 HDMI input, 2 HDMI loop out and 4 HDMI scaling out for video wall processing.


The Toslink jack terminal provides analogue L/R audio and digital SPDIF audio output. 5-way phoenix jacket provide balanced LR audio output.

With this processor you create video wall configurations for any type of display where the bezel correction can be set.


Ideal if you want to switch between 2 video sources and use audio output to your speakers or soundbar.

**Diagram**

Video Wall Processor

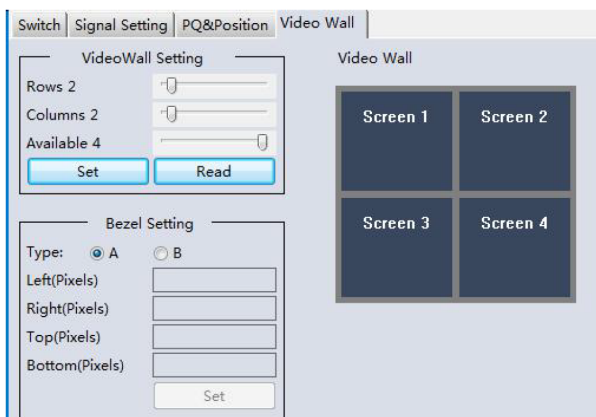

Video Wall display with bezel compensation and different full frame image on display 3

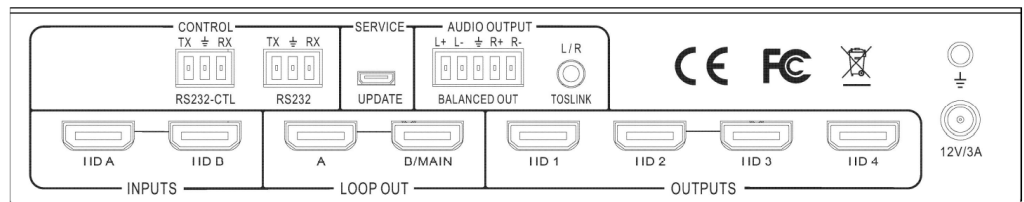

**SPECIFICATIONS:**

Input	2 x HDMI
Output	4 x HDMI
Resolution	4K2K@24/25/30/60Hz
HDMI Standard	2.0
HDCP Version	2.2, 1.4 compliant
RS232	External RS232 control, Baud Rate: 57600 Data Bits:8
HDMI 2.0	4K@60Hz 4:4:4
Balanced Audio out	5-way phoenix Jacket, 20Hz ~ 20kHz, 1.5Vrms max
Mini Toslink	L+R Audio Output 3.5mm Stereo Jack Optical SPDIF Audio Output
Power Supply	Input: AC100 - 240V 50/60Hz, Output: DC 12V/3A
Power Consumption	25 W (Max)
Dimensions	L218 x W146 x H43 mm
Weight	2000 gram

**VW-2X2-H2**



GeMNeXT is brand of

AVDIS B.V.  
Ambachtstraat 3A  
3732 CN DE BILT

The Netherlands

[www.gemnext.com](http://www.gemnext.com)

[info@gemnext.com](mailto:info@gemnext.com)

+31- (0)85 2100 614