

# USER MANUAL

## EXT-UHBT100-SET HDBaseT Extender Set 100m

Ultra-Thin design



**All Rights Reserved**

Version: EXT-UHBT100-SET\_2016V1.2

## Preface

Read this user manual carefully before using this product. Pictures shown in this manual is for reference only, different model and specifications are subject to real product.

This manual is only for operation instruction only, not for any maintenance usage. The functions described in this version are updated till August 2016. Any changes of functions and parameters since then will be informed separately. Please refer to the dealers for the latest details.

**All product function is valid till 2016-8-31.**

## FCC Statement

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. It has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a commercial installation.

Operation of this equipment in a residential area is likely to cause interference, in which case the user at their own expense will be required to take whatever measures may be necessary to correct the interference

Any changes or modifications not expressly approved by the manufacture would void the user's authority to operate the equipment.



## **SAFETY PRECAUTIONS**

To insure the best from the product, please read all instructions carefully before using the device. Save this manual for further reference.

- Unpack the equipment carefully and save the original box and packing material for possible future shipment
- Follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- Do not dismantle the housing or modify the module. It may result in electrical shock or burn.
- Using supplies or parts not meeting the products' specifications may cause damage, deterioration or malfunction.
- Refer all servicing to qualified service personnel.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Do not put any heavy items on the extension cable in case of extrusion.
- Do not remove the housing of the device as opening or removing housing may expose you to dangerous voltage or other hazards.
- Install the device in a place with fine ventilation to avoid damage caused by overheat.
- Keep the module away from liquids.
- Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
- Do not twist or pull by force ends of the optical cable. It can cause malfunction.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.
- Unplug the power cord when left unused for a long period of time.
- Information on disposal for scrapped devices: do not burn or mix with general household waste, please treat them as normal electrical wastes.

---

## **Table of Contents**

1. Introduction .....	5
1.1 Introduction to EXTUHBT100-SET.....	5
1.2 Features .....	5
1.3 Package Contents .....	5
2. Panel Description .....	6
2.1 EXT-UHBT100-T .....	6
2.2 EXT-UHBT100-R .....	7
2.3 Twisted Pair Cable Description .....	9
3. System Connection .....	10
3.1 Usage Precautions .....	10
3.2 System Diagram .....	10
3.3 Connection Procedure .....	11
3.4 Application .....	11
4. Specification .....	11
5. Panel Drawing .....	12
6. Troubleshooting & Maintenance .....	13
7. After-sales Service .....	14

---

# 1. Introduction

## 1.1 Introduction to EXT-UHBT100-SET

EXT-UHBT100-SET is an ultra-thin HDBaseT Extender set consist of transmitter (EXT-UHBT100-T) and receiver (EXT-UHBT100-R).

It distributes HDMI signal via CAT5e/CAT6a cable at 100m/PoE, and enables IR and RS232 passthrough to control remote displays. It also supports 4 Ethernet interface for network.

It provides a perfect long range transmission solution.

## 1.2 Features

- Ultra-thin design.
- The highest resolution is 4Kx2k/60Hz
- HDCP2.2 compliant.
- Maximum transmission distance is up to 70m for 4Kx2K
- Maximum transmission distance is up to 100m for 1080p
- Maximum extension distance is up to 100m for Ethernet.
- Unidirectional PoE allows transmitters to power receiver
- High bandwidth: 10.2Gbps
- Support IR/RS232 passthrough.
- Use HDBaseT technology.
- LED indicators show work status.


**Note:** Please use a CAT5e cable with low impedance (Shielded twisted pair will be better and should be well grounded) for good transmission effect.

## 1.3 Package Contents

- 1 x Transmitter (EXT-UHBT100-T)
- 1 x Receiver(EXT-UHBT100-R)
- 4 x Mounting ears (Separated from EXT-UHBT100-SET)
- 8 x Black Plastic cushions
- 8 x Screws
- 2 x Power adapter (DC 24V 1.25A)
- 2 x RS232 cables
- 1 x User manual

**Notes:** If you find any defective or missing parts, please contact your local dealer.


## 2. Panel Description

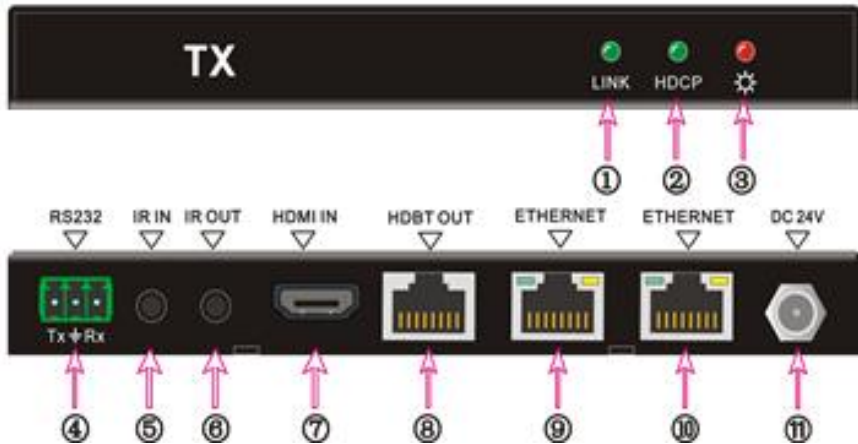

No.	Name	Description
①	LINK	HDBT Link status indicator: ➤ OFF: No Link ➤ GREEN: Link Successful ➤ Blinking GREEN: Link abnormal
②	HDCP	HDCP compliant indicator ➤ OFF: No HDMI traffic (no picture) ➤ GREEN: Traffic with HDCP. ➤ Blinking GREEN: Traffic without HDCP
③	Power	OFF: No power; RED: DC power present.
④	RS232	RS232 connector.
⑤	IR IN	Connect with 5V/12V IR receiver (with carrier) to collect infrared signal, work with far-end IR OUT port
⑥	IR OUT	Connect with 5V/12V IR Emitter to send infrared signal, work with far-end IR IN port
⑦	HDMI IN	Connect with HDMI source
⑧	HDBT OUT	Connect to the HDBT IN socket on the EXT-UHBT100-R via CAT5e/ CAT6a cable, support unidirectional PoE.
⑨	ETHERNET	100M Ethernet interface, when need to work in a LAN, one of

⑩	ETHERNET	these 4 ports (both the Ethernet ports of EXT-UHBT100-T and EXT-UHBT100-R) should be used for internet access, and the others can be connected with computers. If they are well connected, the yellow LED indicators on the corresponding ports will keep blink and the green ones will keep on when working.
⑪	DC 24V	Connect with DC24V 1.25A power adaptor.

Pictures shown in this manual are only for reference.

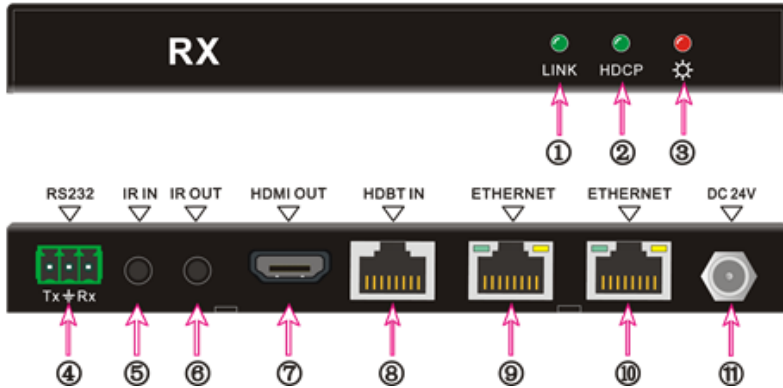

No.	Name	Description
①	LINK	HDBT Link status indicator: > OFF: No Link > GREEN:Link Successful > Blinking GREEN: Link abnormal
②	HDCP	HDCP compliant indicator > OFF: No HDMI traffic (no picture) > GREEN: Traffic with HDCP. > Blinking GREEN: Traffic without HDCP
③	Power	OFF: No power; RED: DC power present.
④	RS232	RS232 connector.
⑤	IR IN	Connect with 5V/12V IR receiver (with carrier) to collect infrared signal, work with far-end IR OUT port
⑥	IR OUT	Connect with 5V/12V IR Emitter to send infrared signal, work with far-end IR IN port
⑦	HDMI OUT	Connect with HDMI display

## EXT-UHBT100-SET Ultra Thin Extender Set



⑧	HDBT IN	Connect to the HDBT OUT socket on the EXT-UHBT100-SET via CAT5e/ CAT6a cable.
⑨	ETHERNET	Ethernet ports, when need to work in a LAN, one of these 4 ports (both the Ethernet ports of EXT-UHBT100-T and EXT-UHBT100-R) should be used for internet access, and the others can be connected
⑩	ETHERNET	with computers. If they are well connected, the yellow LED indicators on the corresponding ports will keep blink and the green ones will keep on when working.
⑪	DC 24V	Connect with DC24V 1.25A power adaptor (Not necessary if EXT-UHBT100-T connects with power).



Pictures shown in this manual are only for reference.




## 2.3 Twisted Pair Cable Description

TIA/EIA T568A		TIA/EIA T568B	
Pin	Cable color	Pin	Cable color
1	green white	1	orange white
2	green	2	orange
3	orange white	3	green white
4	blue	4	blue
5	blue white	5	blue white
6	orange	6	green
7	brown white	7	brown white
8	brown	8	brown
1st Ground	4--5	1st Ground	4--5
2nd Ground	3--6	2nd Ground	1--2
3rd Group	1--2	3rd Group	3--6
4th Group	7--8	4th Group	7--8

The twisted pair used this extender in **MUST** be a straight-through cable.

**Notice:** Cable connectors **MUST** be metal one, the shielded layer of cable **MUST** be connected to the connector's metal shell, to make a better transmission.

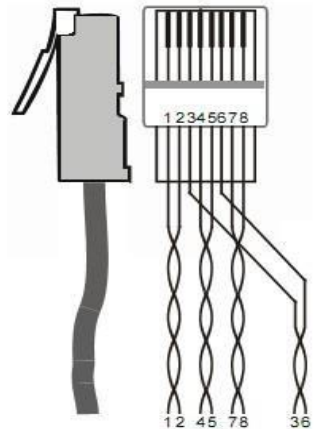


## 3. System Connection

### 3.1 Usage Precautions

- 1) System should be installed in a clean environment and has a prop temperature and humidity.
- 2) All of the power switches, plugs, sockets and power cords should be insulated and safety.
- 3) All devices should be connected before power on.
- 4) Use shielded straight-thru CAT5e/CAT6a cable with TIA/EIA T568B terminations for good transmission effect.

### 3.2 System Diagram

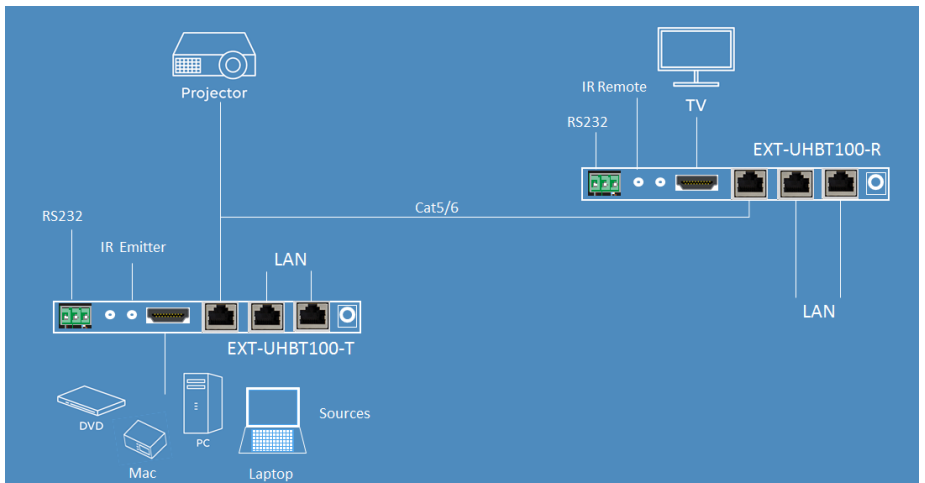

### 3.3 Connection Procedure

- Step1.** Connect HDMI source (such as DVD player) to HDMI IN port of EXT-UHBT100-T with HDMI cable.
- Step2.** Connect HDBT OUT port of EXT-UHBT100-T and HDBT IN port of EXT-UHBT100-R with single CAT5e/CAT6a cable.
- Step3.** Connect HDMI displayer (such as HDTV) to HDMI OUT port of EXT-UHBT100-R with HDMI cable.
- Step4.** Both EXT-UHBT100-T and EXT-UHBT100-R have IR IN and OUT. When one model use for IR signal receiver, the IR signal must be sent out by the other model.
- For example: When “IR IN” of EXT-UHBT100-R connects with an IR receiver, the IR Emitter must be connected to “IR OUT” of EXT-UHBT100-T.
- Step5.** To set as a LAN, one of the four ETHERNET ports of EXT-UHBT100-T and EXT-UHBT100-R should be used for Internet access, and the others can be connected with computers.
- Step6.** Connect the RS232 port of the computer and the RS232 port of EXT-UHBT100-T or EXT-UHBT100-R (any one is able to work as the RS232 signal can be transmitted bi-directionally) by using a RS232 cable.
- Step7.** Connect with DC24V power adaptor(s) separately or only connect power adaptor to EXT-UHBT100-T).

### 3.4 Application

EXT-UHBT100-SET has a good application in various occasions, such as computer realm, monitoring, big screen displaying, meeting room, education and bank & securities institution etc.


## 4. Specification

	EXT-UHBT100-T	EXT-UHBT100-R
<b>INPUT</b>		
Input Signal	1 x HDMI, 1 x IR in, 1 x RS232	1 x IR in, 1 x HDBaseT, 1 x RS232
Input Connector	1 x HDMI female 1 x 3.5mm mini jack 1 x 3P captive connector	1 x 3.5mm mini jack 1 x RJ-45, 1 x 3P captive connector
Video Signal	HDMI 1.4a	HDMI 1.4a
Audio Signal	Digital audio transmit through HDMI audio	Digital audio transmit through HDMI audio
<b>OUTPUT</b>		
Output Signal	1 x HDBaseT, 1 x IR in, 1 x RS232	1 x HDMI, 1 x IR out, 1 x RS232
Output Connector	1 x RJ-45 1 x 3.5mm mini jack 1 x 3P captive connector	1 x HDMI female 1 x 3.5mm mini jack 1 x 3P captive connector
<b>Ethernet Port</b>		
Ethernet Connector	1 x Black RJ45, with dual color indicator (Green & Yellow)	2 x Black RJ45, with dual color indicator (Green & Yellow)
Transmission Speed	Adaptive 10M/100M (max), full duplex or half duplex	
<b>General</b>		
Transmission Mode	HDBaseT	
Resolution	800x600@60Hz, 1024x768@60Hz, 1280x720@60Hz, 1280x1024@60Hz, 1366x768@60Hz, 1600x1200@60Hz, 1920x1080@60Hz, 1920x1200@60Hz, 3D, 4Kx2K	
Transmission Distance	1080p: 100 meter – 4K x 2K: 70 meter	
Bandwidth	10.2Gbps	
HDMI Standard	HDCP 2.2	
Impedance	75Ω	
Temperature	0 ~ 50°C	
Humidity	0% ~ 90%	
Power Consumption	10W	
Power Supply	Input: 100VAC~240VAC, 50/60Hz; Output: 24VDC 1.25A	
Dimension (W*H*D)	152mmx16mmx84mm	
Net Weight	186 gram	196 gram


**NOTE:** All nominal levels are at ±10%.

## 5. Panel Drawing

EXT-UHBT100-T

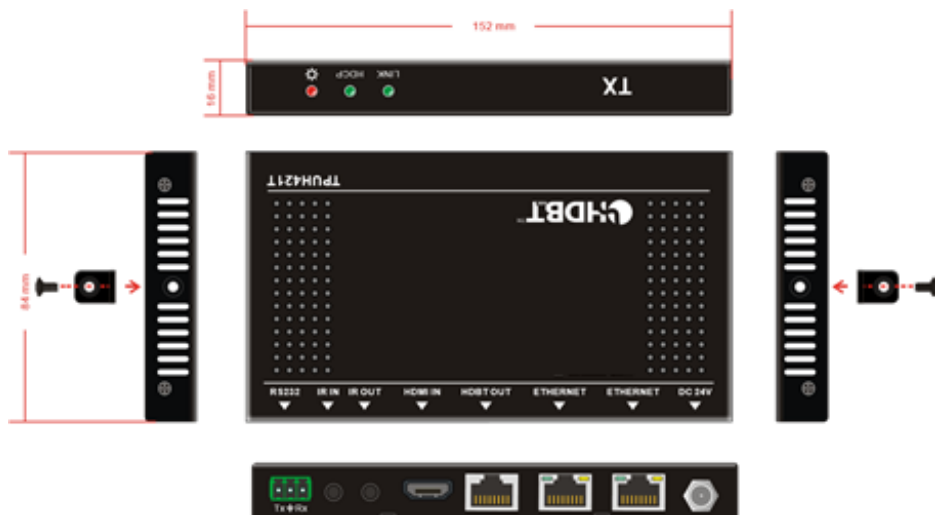

EXT-UHBT100-R

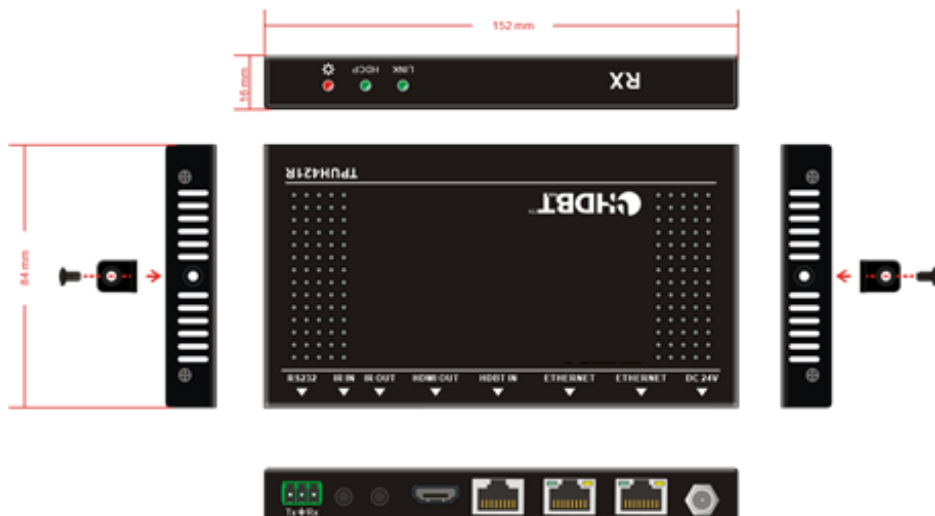

## 6. Troubleshooting & Maintenance

Problems	Causes	Solutions
Output images in display show with ghost	Incorrect setting on the display	Check the display's setting
	A cable of bad quality	Try another high quality connection cable
No output image when switching	No signal at the input / output end	Check with oscilloscope or multimeter if there is any signal at the input / output end.
	Fail or loose connection	Make sure the connection is good
	The extender is broken	Send it to authorized dealer for repairing.
Cannot control the device by control device (e.g. a PC) through RS232 port	Wrong RS232 communication parameters	Make sure the RS232 communication parameters are correct.
	The device has already been broken	Send it to authorized dealer for repairing.
Cannot recognize device connected to the ETHERNET port	The connected device has the same IP address with the extender	Change the IP address of the extender or the connected device.
Static becomes stronger when connecting the video connectors	Bad grounding	Check the grounding and make sure it is connected well.
Cannot control the device by RS232 / IR	The device has already been broken	Send it to authorized dealer for repairing.

If your problem persists after following the above troubleshooting steps, seek further help from authorized dealer or our technical support.

## 7. After-sales Service

If there appear some problems when running the device, please check and deal with the problems reference to this user manual. Any transport costs are borne by the users during the warranty.

- 1) **Product Limited Warranty:** GeMNeXT warrants that its products will be free from defects in materials and workmanship for **three years**, which starts from the first day the product leaves warehouse (check the SN mark on the product). Proof of purchase in the form of a bill of sale or receipted invoice must be presented to obtain warranty service.
- 2) **What the warranty does not cover:**
  - Warranty expiration.
  - Factory applied serial number has been altered or removed from the product.
  - Damage, deterioration or malfunction caused by:
    - Normal wear and tear
    - Use of supplies or parts not meeting our specifications
    - No certificate or invoice as the proof of warranty.
    - The product model showed on the warranty card does not match with the model of the product for repairing or had been altered.
  - Damage caused by force majeure.
  - Servicing not authorized
  - Any other causes which does not relate to a product defect
  - Delivery, installation or labor charges for installation or setup of the product
- 3) **Technical Support:** Email to our after-sales department or make a call, please inform us the following information about your cases.
  - Product version and name.
  - Detailed failure situations.
  - The formation of the cases.

**Remarks:** For any questions or problems, please try to get help from your local distributor or contact GeMNeXT at [www.GeMNeXT.com](http://www.GeMNeXT.com)



[www.GeMNeXT.com](http://www.GeMNeXT.com)

**GeMNeXT rights owned by AVDIS B.V.**

**Tel:** +31 (0)85 2100 614

**Email:** [info@gemnext.com](mailto:info@gemnext.com)

**Website:** [www.gemnext.com](http://www.gemnext.com)

Ambachtstraat 3A  
3732 CN De Bilt  
The Netherlands